


OV

VIBRANCE

BY PERGO



V0V695
WHITE OILED OAK

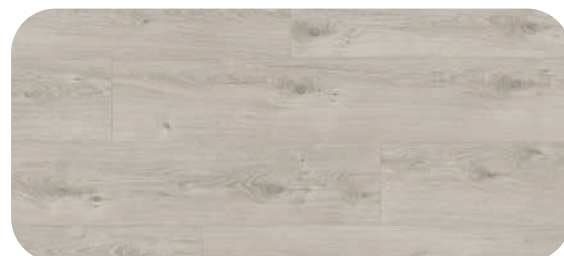


V0V858
LIRAC OAK



V0V799
SPRING OAK



V0V436
TAYLOR OAK

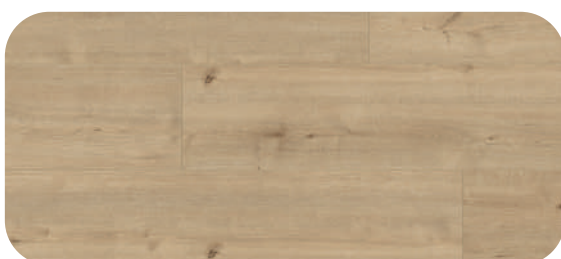

V0V834
VANCOUVER OAK



V0V605
MORAINÉ NATURAL OAK



V0V805
LEGEND OAK



V0V481
AUTHENTIC OAK

HDF 8 MM | 1261 x 192 MM | 49.6456 x 7.559 INCH | 4.1371 x 0.6299 FT |
9 PLANKS/PACK | 2,179 M² = 23.4546 FT² | ± 15.5 KG/PACK = ± 34.17 POUND/PACK
Colors and designs on this sheet might slightly vary from real product due to printing techniques. © Unilin BV*



HYGIENIC



ANTI-
STATIC



CASTOR
CHAIR



EASY
INSTALLATION



EASIER
CLEANING



HIGH FIRE
RESISTANT



BETTER
ERGONOMICS



SCRATCH
RESISTANT



IMPACT
RESISTANT



SOUND
RESISTANT



WATER
RESISTANT



WEAR
PROTECTION

	Method Methode Méthode Methode	Parameters Parameters Paramètres Parameter	Norm requirements Normvereisten Exigences de normes Normvorschriften	Values Waarden Valeurs Werte
Class of use Gebruiksklasse Classe d'utilisation Nutzungsklasse	EN 13329		Class 32 Klasse 32 Classe 32 Klasse 32	All residential use up to commercial use Van residentieel tot commercieel gebruik Toutes, de l'utilisation résidentielle à l'utilisation commerciale Alle, von der Wohn- bis zur Gewerbenutzung
Wear resistance Slijtageweerstand Classe de résistance Verschleißwiderstand	EN 13329		≥ 4000	≥ 4000
Wearclass Slijtageklasse Classe de résistance Widerstandsklasse	EN 13329		AC 4	AC 4
Thickness swelling Dikte zwellung Gonflement d'épaisseur Quelldicke	EN 13329		≤ 18 %	OK
General aspect of installed flooring Algemeen Aspect van geïnstalleerde vloer Aspect général du plancher installé Allgemeiner Zustand des Untergrundfußbodens	EN 13329	Height Difference Hoogteverschil Différence de hauteur Höhenunterschied	≤ 0,15 mm	✓
		Openings Openingen Ouvertures Öffnungen	≤ 0,20 mm	✓
		Flatness length Lengte vlakheid Longueur aspect plat Ebenheit Länge	Concave Concaaf Concave Konkav ≤ 0,50 % Convex Convex Convexe Konkav ≤ 1,00 %	≤ 0,50 % ≤ 1,00 %
		Flatness width Breedte vlakheid Largeur aspect plat Ebenheit Breite	Concave Concaaf Concave Konkav ≤ 0,15 % Convex Convex Convexe Konkav ≤ 0,20 %	≤ 0,15 % ≤ 0,20 %
Impact class Impactklasse Classe d'impact Aufprallklasse	EN 13329		IC2	IC2
Staining Spatten Taches Fleckenbildung	EN 438-2,15		5 (group 1&2) 4 (group 3)	5 (group 1&2) 4 (group 3)
Light Fastness Lichtvastheid Résistance à la lumière Lichtbeständigkeit	EN ISO 4892		≥ 4	4
Burning cigaret Brandende Sigaret Brûlures de cigarettes Zigarettenbrand	EN 438-2,18		4	4
Movement of furniture feet Beweging van meubelpoten/-wielotjes Mouvement des pieds de meubles Bewegung von Möbelfüßen	EN 424			No damage Geen schade Pas de dommages Keine Beschädigungen
Castor Chairs Stoelen op wielotjes Chaises à roulettes	EN 425			No damage Geen schade Pas de dommages Keine Beschädigungen
Slip resistance Slip weerstand Résistance aux glissements Rutschfestigkeit	EN 13893		Class DS: ≥ 0,30 µ	Class DS
Emission of formaldehyde Formaldehyde-emissie Emission de formaldéhydes Formaldehydausdünstung	EN 717-2		Class E1: ≤ 0,1 mg/m².h	< 0,01
Reaction to fire Brandreactie Réaction au feu Feuerfestigkeit	EN 13501-1		Efl S1	Cfl S1
Thermal resistance Thermische weerstand Résistance thermique Wärmewiderstand	ISO 8302		max. 0,15 m² K/W	R = 0,055 (m².K/W)
Underfloor heating Ondervoerverwarming Chauffage par sol Fußbodenheizung		Specific instructions Specifieke Instructies Instructions spécifiques Besondere Nutzungsanweisungen		OK

